


PKCN	REV.	DATE	REVISIONS	ENR	ISSN	CHK	APPV.
	Δ		INITIAL RELEASE REF: A03-E-6000 REV1A				

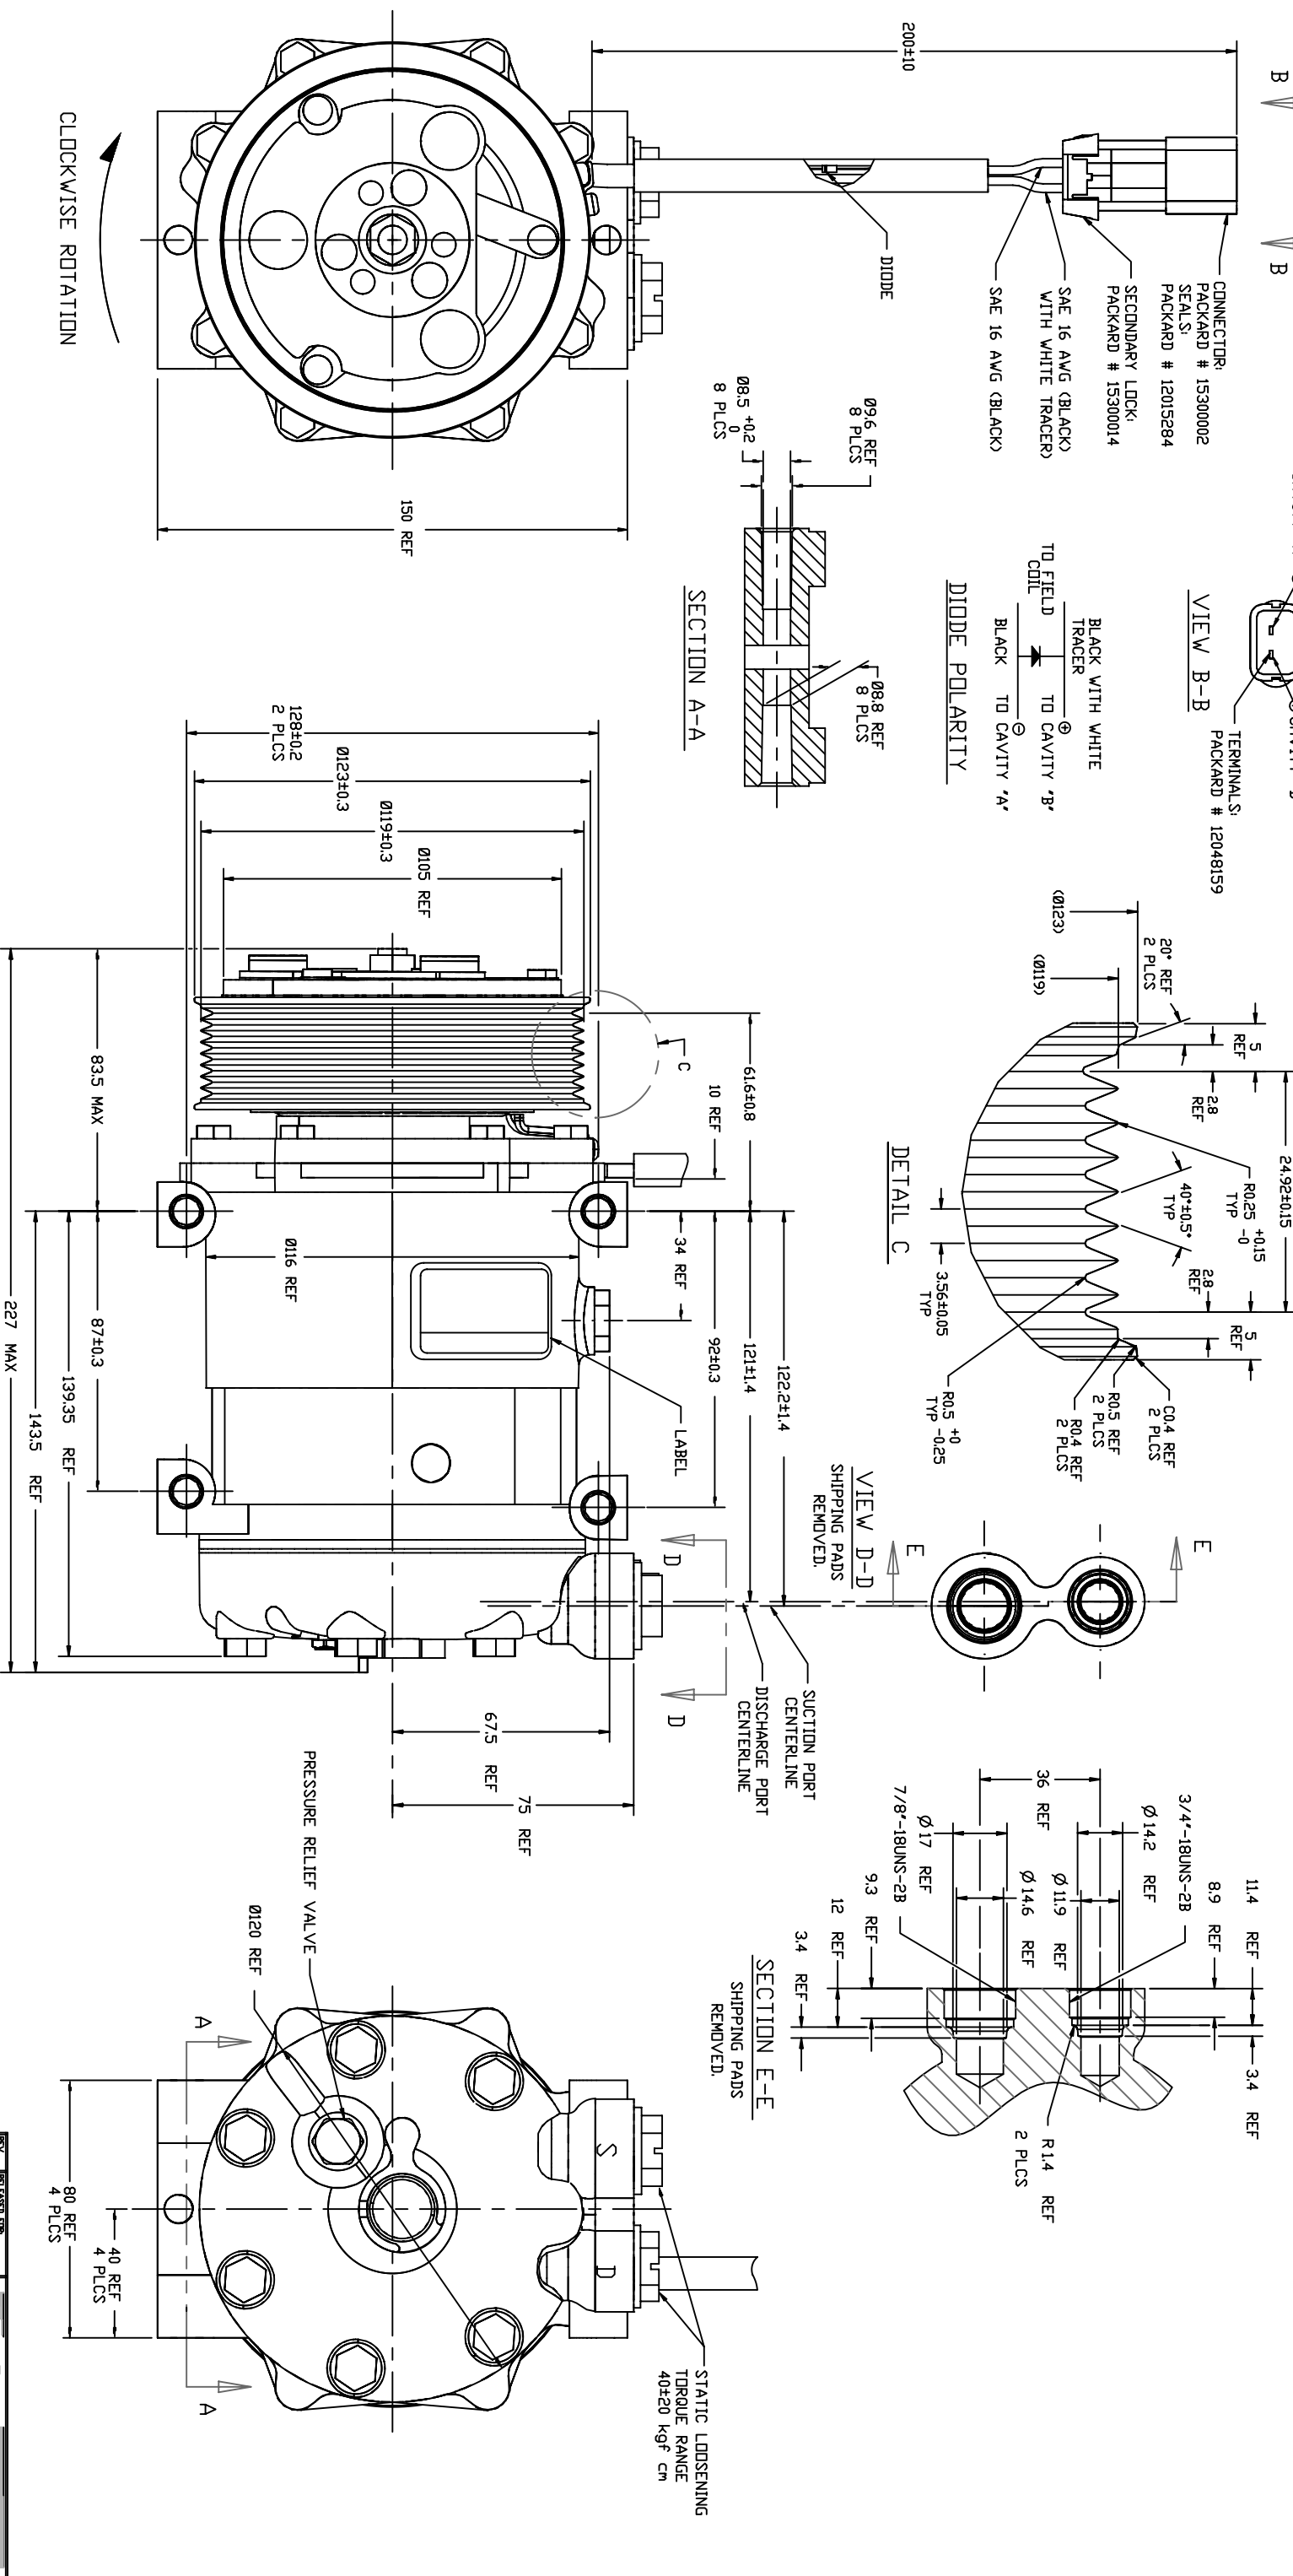

COMPRESSOR SPECIFICATIONS

DISPLACEMENT PER REVOLUTION	154.9 cc / rev. (9.5cuin. / rev.)
MAXIMUM ALLOWABLE R.P.M.	8000 R.P.M.
MAXIMUM ALLOWABLE CONTINUOUS R.P.M.	6000 R.P.M.
REFRIGERANT	R134a
OIL (SP-15)	300 cc (10.1 floz.)

CLUTCH SPECIFICATIONS

RATED VOLTAGE	DC 12V
BREAKAWAY TORQUE	3.5 kgf-m min. @ 12V
MINIMUM ENGAGEMENT VOLTAGE	7.5V @ AIR GAP 0.6mm REF
POWER CONSUMPTION	49 watts max.
BELT TYPE	PV8 TYPE
MAXIMUM ALLOWABLE BELT TENSION	120 kgf
PULLEY DIAMETER	Ø119 mm (4.68 in.)
CLUTCH TYPE	HEAVY DUTY

SANDEN

METRIC

THE DRAWING AND THE INFORMATION CONTAINED HEREON ARE THE PROPERTY OF SANDEN INTERNATIONAL (USA), INC. AND SHALL BE USED, COPIED, OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF SANDEN INTERNATIONAL (USA), INC.

INTERPRETATION OF THIS DRAWING PER ASME Y14.3M-1994

THIRD ANGLE PROJECTION

COMPRESSOR

DWG. NO. 4307-6000

REV. A