
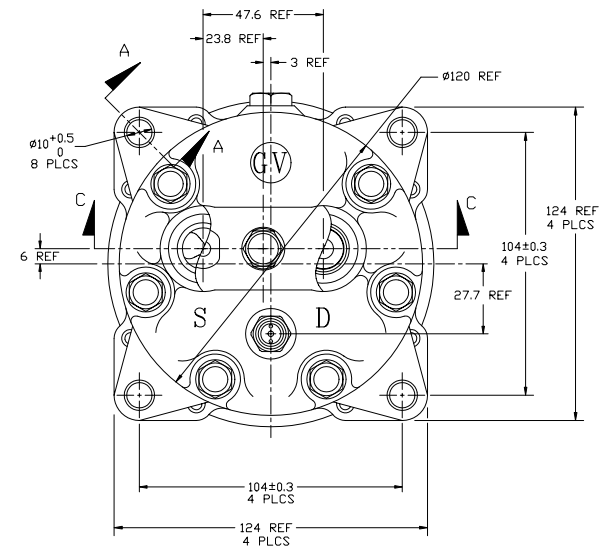





DISPLACEMENT PER REVOLUTION	1549 cc / rev. (9.5 cu. in. / rev.)
MAXIMUM ALLOWABLE R.P.M.	7000 R.P.M.
MAXIMUM ALLOWABLE CONTINUOUS R.P.M.	6000 R.P.M.
REFRIGERANT	R134a
OIL (SP-15)	200 cc (6.76 floz.)

RATED VOLTAGE	DC 24V
BRAKAWAY TORQUE	3.5 kgf-m min. @ 24V
MINIMUM ENGAGEMENT VOLTAGE	16V @ AIR GAP 0.6mm REF
POWER CONSUMPTION	34 watts max.
BELT TYPE	PV 10
MAXIMUM ALLOWABLE BELT TENSION	120 kgf
PULLEY DIAMETER	ø125 mm (4.92 in.)
CLUTCH TYPE	STANDARD

PDCN	REV.	APPV DATE	REVISIONS	DWN	DSGN	CHK	APPV
			INITIAL ISSUE				
R004110		5/12/04	KEYED RUBBER DAMPED ARMATURE WAS KEYED STANDARD ARMATURE.				

REV. LEVEL	RELEASED FOR ENGINE DEVELOPMENT		 SANDEN SANDEN INTERNATIONAL, U.S.A., INC.	
A	DRAWN J. Sakaguchi DATE 4/15/74 BY NP	DRAWN SCALE REF 1:1	PLATTED SCALE REF 1:1	METRIC
REV. LEVEL	THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY TO Sanden International (U.S.A.), Inc., are not to be CONFIDENTIAL and shall not be used, copied, or disclosed to others without the written permission of Sanden International (U.S.A.), Inc.			
B	APPROV. DATE 4/16/74 RELEASED FOR PRODUCTION DISG 1/2" X 3/8" X 1/2"	INTERPRETATION OF THIS DRAWING PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION 		
REV. LEVEL	APPROV. DATE 8/27/74 RELEASED FOR PRODUCTION VALVE DISG 1/2" X 3/8" X 1/2"	MATERIAL:		SIZE D
B	APPROV. DATE 8/27/74 RELEASED FOR PRODUCTION DISG 1/2" X 3/8" X 1/2"	NAME: COMPRESSOR		
REV. LEVEL	APPROV. DATE	DISG NO. 4309-6000	REV B	