

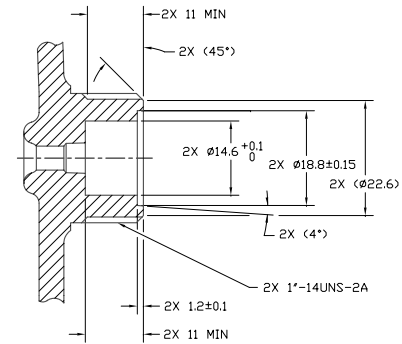
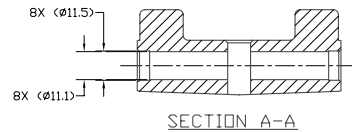
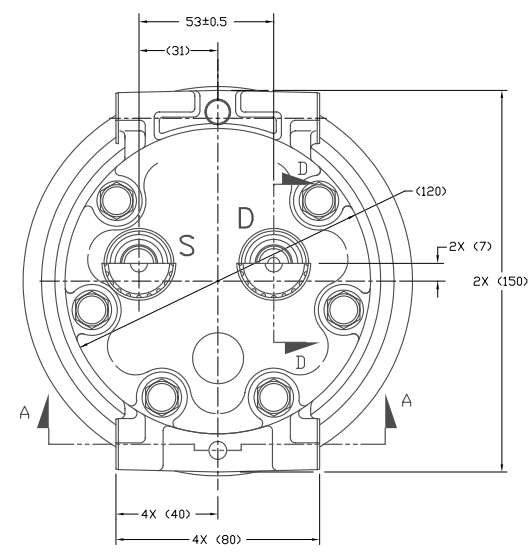


PCDN	REV.	APPV	DATE	REVISIONS	OWN	ESGN	CHK	APPV
				INITIAL RELEASE				

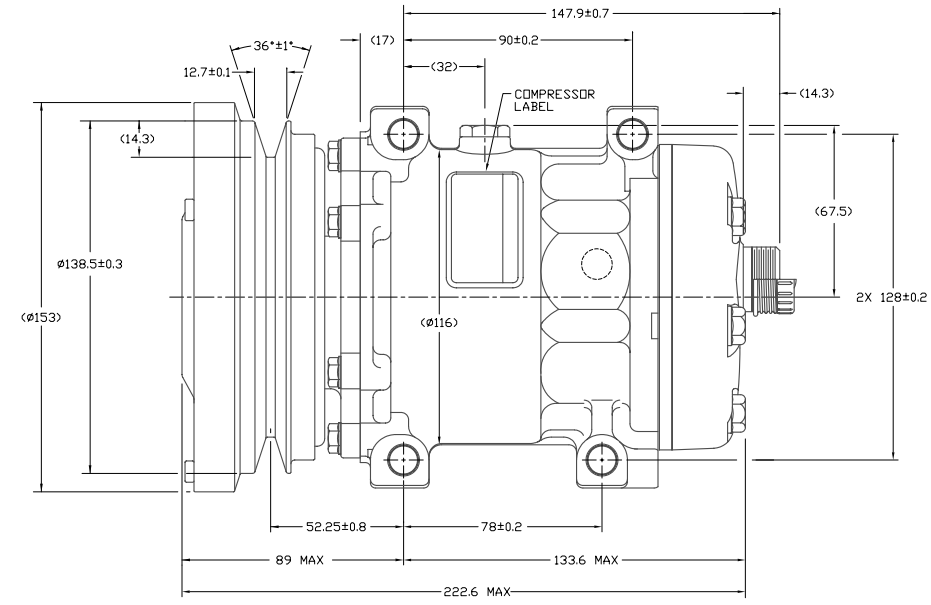

SECTION B-B
SCALE 2:1
(SECTION SHOWN WITH
SEAL CAP REMOVED)

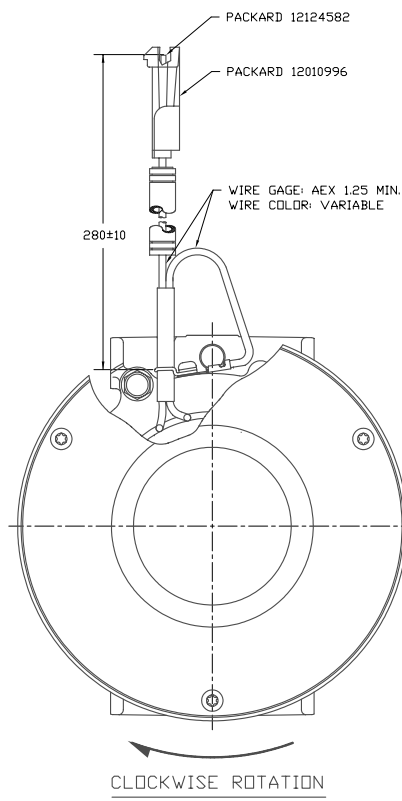

COMPRESSOR SPECIFICATIONS (REF.)

DISPLACEMENT PER REVOLUTION	154.9 cc / rev. (9.5cu.in. / rev.)
MAXIMUM ALLOWABLE SPEED	5000 R.P.M.
MAXIMUM ALLOWABLE CONTINUOUS SPEED	5000 R.P.M.
REFRIGERANT	R134a
OIL (SP-15)	300 cc (10.1 floz.)

CLUTCH SPECIFICATIONS (REF.)

RATED VOLTAGE	DC 24V
BREAKAWAY TORQUE	3.5 kgf-m MIN. @ 24V
MINIMUM ENGAGEMENT VOLTAGE	16V MAX @ AIR GAP 0.4~0.8mm
POWER CONSUMPTION	40 watts MAX.
BELT TYPE	A TYPE
MAXIMUM ALLOWABLE BELT TENSION	60 kgf
PULLEY DIAMETER	Ø138.5mm (5.45 in.)
CLUTCH TYPE	SEALED HEAVY DUTY

DO
NOT
SCALE

SANDEN SPECIAL INTERNATIONAL WARRANTY, INC.	
REV. LEVEL A RELEASED FOR DESIGN VAL. B. DATE: 7/13/96 APPV: AA FOR NS DESIGNED BY: J. Sokolowski DRAWN BY: J. Sokolowski SCALE: 1:1	PLOTTED SCALE: 1:1 METRIC This drawing and the information contained herein are CONFIDENTIAL and PROPRIETARY to Sanden International (U.S.A.), Inc., are received in CONFIDENCE and shall not be used, copied, or disclosed to others without the written permission of Sanden International (U.S.A.), Inc. INTERPRETATION OF THIS DRAWING PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION SIZE D MATERIAL:
NAME: COMPRESSOR, SD7H15 ENHANCED CAPACITY DWS NO. 4402-6000 REV. A	