


LTR	DATE MM/DD/YY	BY	CHK'D	PROVE OUT	PROG APPR	REVISION
--	6-24-09	RMK	CKD	JLC	JCS	INITIAL RELEASE (ER-SIG348; EC-MFG1074)

MOTOR-BLOWER

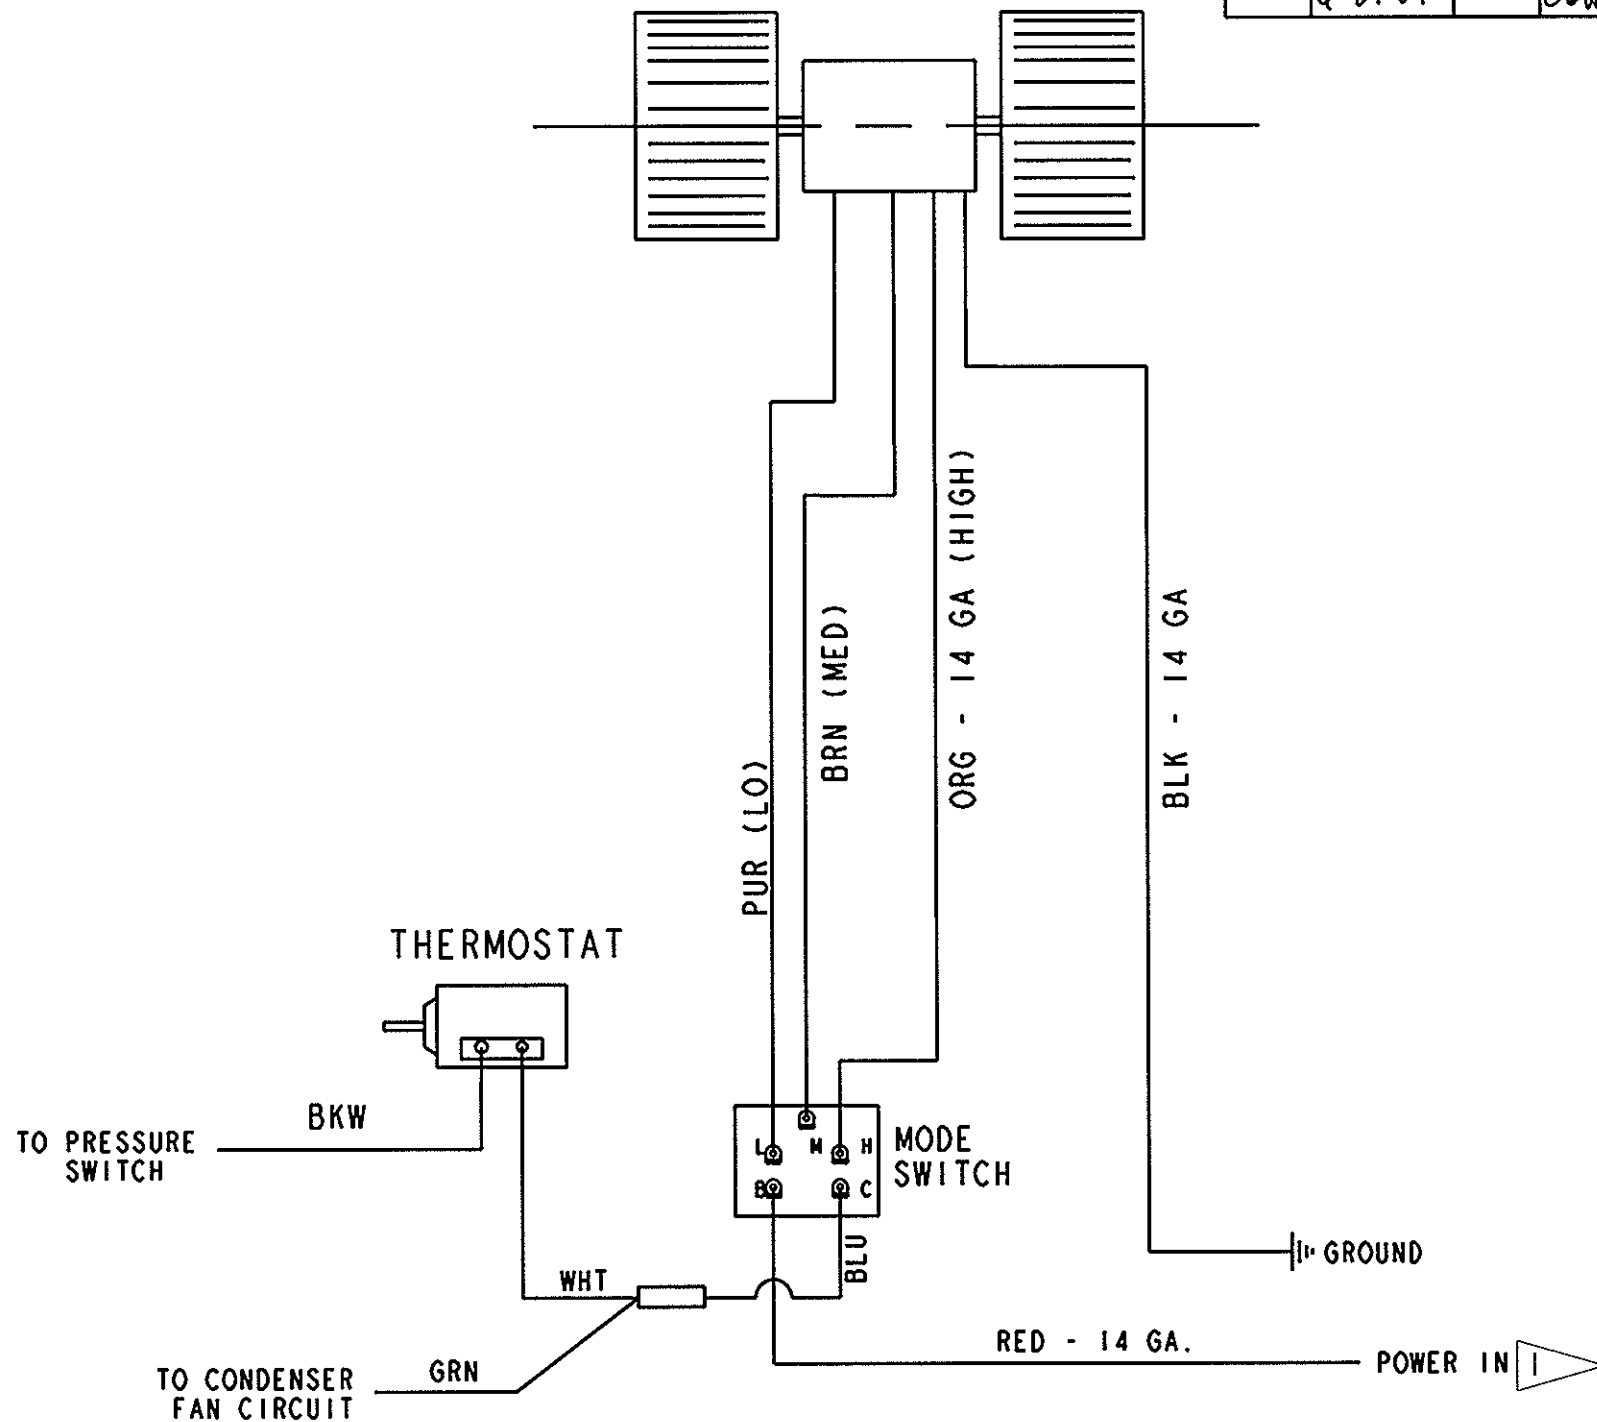

1) USE 15 AMP FUSE OR BREAKER FOR 24V SYSTEM (CUSTOMER SUPPLIED)
 USE 30 AMP FUSE OR BREAKER FOR 12V SYSTEM (CUSTOMER SUPPLIED)

2) SEE RD-2-5663-0 WIRE HARNESS ASSY FOR INDIVIDUAL
 WIRE DESCRIPTIONS AND SPECIFICATIONS

1) ALL WIRES ARE 16 GA UNLESS OTHERWISE SPECIFIED

NOTES:

-0	ITEM		PART NO.	DESCRIPTION	MAT'L	FINISH	
	DWN	R. KROFFT	5-6-09	WIRING DIAGRAM R-2300			
	CKD	C. HARVEY	5-6-09				
SCALE: DRAWING SCALE					THIS PRINT IS PROPRIETARY INFORMATION LOANED SUBJECT TO RETURN UPON DEMAND AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETRIMENTAL TO RED DOT CORPORATION		
RED DOT CORPORATION 495 Andover Park East Seattle, WA 98188				NEXT ASSY CUSTOMER	DWG. NUMBER RD-2-5743	SIZE B	SHEET 1 of 1